

## auto electrical parts

### Technical Information Sheet

#### Part No. 0-977-range


Single insulated flexible starter/battery cable.

#### Additional Information

0-977-10 black  
0-977-15 red



#### Technical Drawing (not to scale)

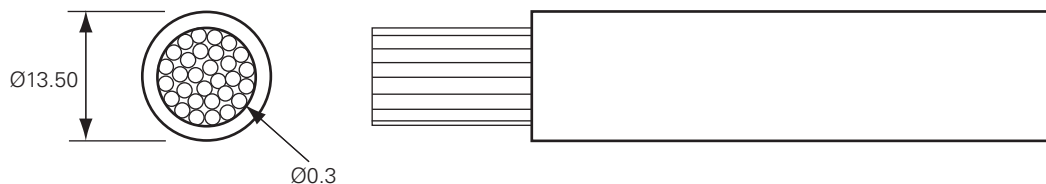

#### Specification

Type	Single insulated starter/battery cable for use in tough conditions
Wire	640/0.30mm copper
Cross section	50.0mm <sup>2</sup>
Current rating	345 amp
Voltage	100 volt dc maximum
Resistance	424.0mΩ/m @ 20°C
Insulation	Soft semi filled general purpose extrusion grade PVC insulation compound
Overall diameter	13.5mm
Temperature	-30° to 70°C
Length of Cable	10 Metres

The information contained in this document is correct to the best of our knowledge at the time of printing. However, specifications may change at any time without notice.